



STARSLITE BOX UP EXIT EMERGENCY LIGHT

Model: SFES-E


SPECIFICATION:

Input Voltage:	220V+/-10%, 50/60Hz
Mode of Operation:	Combined maintained
Lamp:	18 SMD LED
Safety Feature:	Over discharge and over charge protection
Rated Duration:	2/3 hours
Power Consumption:	3W
Test Facility:	Micro switch for independent test
Mounting:	Wall or Ceiling
Battery Type:	High Temperature Ni-Cd
Fitting Construction:	Electro galvanised Steel with Powder Coating
Compliance:	MS619, IEC598-2-22
Warranty:	1 year




Benefits:
 High durability
 No replace bulb
 Easy Installation
 Maintenance Free
 Power saving 90%

We design for easy intallation

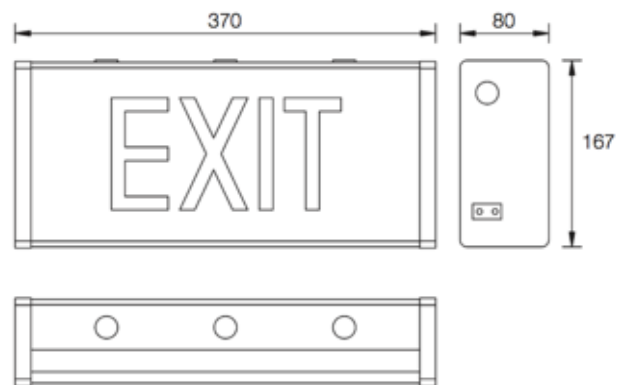

Dimension: mm NTS

ENVIRONMENTALLY FRIENDLY



Note: Due to continuous development and improvement, our company reserve the right to change specification without notice