




EXIT EMERGENCY LIGHT

SPECIFICATION:

Input Voltage	: 220V+/-10%, 50/60Hz	
Mode of Operation	: Combined maintained	
Lamp	: SMD LED	
Safety Feature	: Over discharge and over charge protection	
Rated Duration	: 2 hours	
Power Consumption	: 3.6W	
Fitting Construction	: Steel sheet c/w white epoxy powder coating casing	
Mounting	: Wall, Ceiling, Pendant mounting	
Diffuser	: Fire retardant Cast PC, Acrylic sheet	
Battery Type	: Ni-Cd	
Unit Dimension(mm)	: 800X250X30	Plate Dimension(mm) : 790X220
Weight	: 1.8Kgs	
Compliance	: MS 983, IEC598-2-22	
Warranty	: 1 year	

Benefits:

High durability
No replace bulb
Easy Installation
Maintenance Free
Power saving 90%

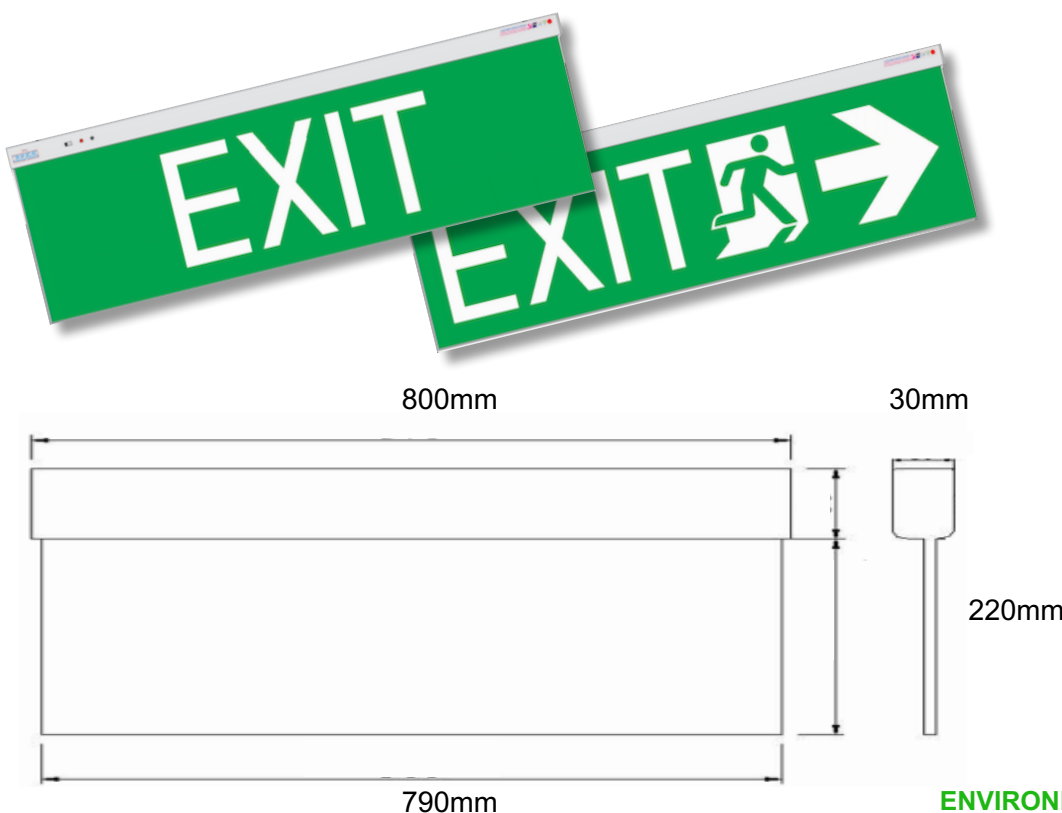

ENVIRONMENTALLY FRIENDLY

ORDERING GUIDE

SLES-E(S)	SLES-ERM(S)	SLES-EAL(S)	SLES-EARL(S)	SLES-EAR(S)

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice