



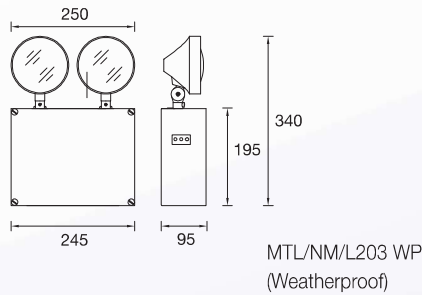

● MTL/NM/L203

● MTL/NM/L203 WP
(Weatherproof)

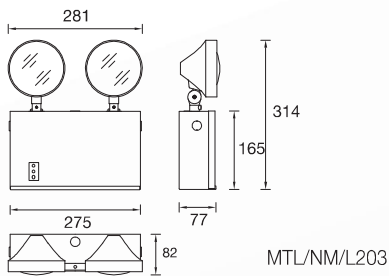

Dimension: mm NTS

High Power L.E.D

KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan



Type and batch tested with
PSB PLS-LISTED LABEL

Surface Mount
Wide Angle
Emergency Luminaire



IP30
Can be
upgraded to IP65
CLASS I



TECHNICAL DATA

- Mode of Operation : Non-Maintained
- Lamp : 2 x 3W High Power LED
- Rated Duration : 2 hr and others
- Mains Supply : 230 Volts, 50/60Hz
- Power Consumption : > 2VA
- Battery : Maintenance-free sealed lead calcium battery
(High temp nickel cadmium available)
- Charge Monitor : Green LED Ø5mm
- Test Facility : Micro switch
- Safety Feature : Low volt cut-off preventing battery overdischarge
- Fitting Construction : Electro galvanised steel with epoxy powder coating
The adjustable fire-retardant lamp-heads allow flexibility
in angle of projection. Lamp heads comes with
anti-glare lens
- Mounting : Wall
- Cable Entry : Ø20mm K/O hole
- Weight : 2.6kg (gross)
- Compliance : SS 563 : Part 1 & 2, SS IEC 60598-2-22
- Warranty : 1 year

ORDERING GUIDE

(Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
MTL/NM/L203	2 x 3W LED	Sealed lead calcium
MTL/NM/L203 NC	2 x 3W LED	Nickel cadmium

Note:

Can be upgraded to IP65 for all weather condition.

MTL/NM/L203 WP and MTL/NM/L203 NC WP for all weather condition.

*Heating strip applicable (for cold room used)